



eptarefrigeration

PLUG-IN POWER



DELIGHT



PRIME VERSION



LITE VERSION

Customized graphic optional



Frozen food



Hot-gas defrosting system



Static



Free maintenance condenser



Electronic controller



LED lighting



High efficiency fans



eptarefrigeration

PLUG-IN POWER




TECHNICAL DETAILS



Model Lite/Prime	Dimension L x W x H	Operating temperature	Energy consumption Kwh/24h
Delight 6	1178x726x1223	-25°/-18°C	5,50 Kwh/24h
Delight 7	1328x726x1223	-25°/-18°C	7,00 Kwh/24h
Delight 9	1663x726x1223	-25°/-18°C	9,50 Kwh/24h

Model	Cooling system	Refrigerant gas	Defrost system
Delight 6	Static	R290	Automatic
Delight 7	Static	R404A/R507/R290	Automatic
Delight 9	Static	R290	Automatic

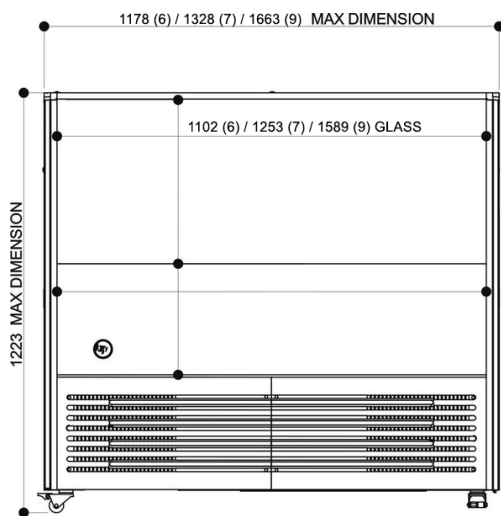


DISPLAY Delight 6-7-9



- Delight 6
- ■ Delight 7
- ■ □ Delight 9

STORAGE 2 lines of bins

- ■ Delight 6
- ■ Delight 7
- ■ □ Delight 9

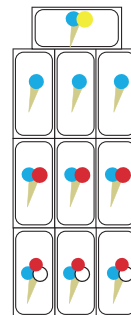

ACCESSORIES



	STD	OPT
lock system (only Delight 7)		●
S/S bin		●
Scoop washer		●
LED inserts on front corners and grid - Prime version	●	