



Outperform every day.™

Project:

Item Number:

Quantity:

INTERNATIONAL MIRAGE® INDUCTION COUNTERTOP RETHERMALIZER



Mirage® Induction Countertop Rethermalizer

DESCRIPTION

Vollrath's Mirage® Induction Countertop Rethermalizers use innovative induction technology to run dry without a water bath, improve food quality and minimize food waste; while using a fraction of the energy.

Mirage® Induction Countertop Rethermalizers are shipped complete with an induction-ready inset and slotted hinged cover.

PERFORMANCE CRITERIA

The Mirage® Induction Countertop Rethermalizer are designed to take a container of cooked food from a chilled state (below 40.0° F [4.4° C]) through the HACCP "danger zone" of 165° F (73.9° C) in less than 90 minutes. The performance standard is measured using the NSF mixture chilled to 35° F (1.7° C). The electric unit will raise the temperature of this product above 165° F (73.9° C) in less than 90 minutes. The temperature will be maintained above 150° F (65.6° C) when the food product and pan or inset are used with a standard pan or inset cover, and the food product is stirred regularly.

IMPORTANT

- Failure to use Vollrath induction-ready insets may damage the unit and will void the warranty.
- All models require unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Countertop models require a minimum clearance of 4 inches (10.2 cm) at the rear and 1 inch (2.5 cm) at the bottom.

Agency Listings



The Vollrath Company, L.L.C.
 Headquarters
 1236 North 18th Street
 Sheboygan, Wisconsin
 53081-3201 USA
 Tel: 920-457-4851
 Main Fax: 920-459-6573
www.vollrath.com

Vollrath Europe BV
 Beneluxbaan 7
 5121 AD RIJEN
 The Netherlands
 +31161870005

Vollrath of China
 Vollrath Shanghai Trading Limited
 29D, 855 South Pu Dong Road
 Shanghai, China 200120
 Tel: 86-21-50589580

Vollrath de Mexico S. de R.L. de C.V.
 Periferico Sur Edificio 2-C
 Col. Santa Maria Tequepexpan
 45601 Tlaquepaque, Jalisco Mexico
 Tel: (52) 333-133-6767
 Tel: (52) 333-133-6769
 Fax: (52) 333-133-6768

MODELS

| 6.6 Liter | | 10.4 Liter | |
|-----------|--------------------|------------|--------------------|
| 7470210 | Natural, Schuko | 74110210 | Natural, Schuko |
| 7470240 | Red, Schuko | 74110240 | Red, Schuko |
| 7470310 | Natural, UK | 74110310 | Natural, UK |
| 7470340 | Red, UK | 74110340 | Red, UK |
| 7470410 | Natural, China | 74110410 | Natural, China |
| 7470440 | Red, China | 74110440 | Red, China |
| 7470510 | Natural, Australia | 74110510 | Natural, Australia |
| 7470540 | Red, Australia | 74110540 | Red, Australia |

FEATURES

- 800 watt 3D induction coil heats food evenly and efficiency.
- Dry use. Heat is transferred directly to the induction-ready inset, which eliminates the need to monitor and refill water levels.
- Three temperature sensors have direct contact with the inset to provide very accurate temperature control. Sensors help prevent food in near-empty insets from burning, which maintains food quality and reduces food waste.
- Sensors measure differences in food temperatures. This drives the Stir Indicator LED that informs operators the food product should be stirred.
- Advanced solid state controls with highly visible white LEDs include: temperature control in °F and °C, stirring indicator, and a locking function that prevents untrained operators from changing settings.
- Includes cover – item 47488 for 6.6 L. or 47490 for 10.4 L., and inset – item 88184 for 6.6 L. or item 88204 for 10.4 L. Covers and insets are also sold separately.
- Requires use of included Vollrath induction-ready inset.
- 6 ft. (1.8 m) power cord with plug.


WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to www.vollrath.com.

| Approvals | Date |
|-----------|------|
| | |


Due to continued product improvement, please consult www.vollrath.com for current product specifications.

INTERNATIONAL MIRAGE® INDUCTION COUNTERTOP RETHERMALIZER

DIMENSIONS (shown in inches (cm))

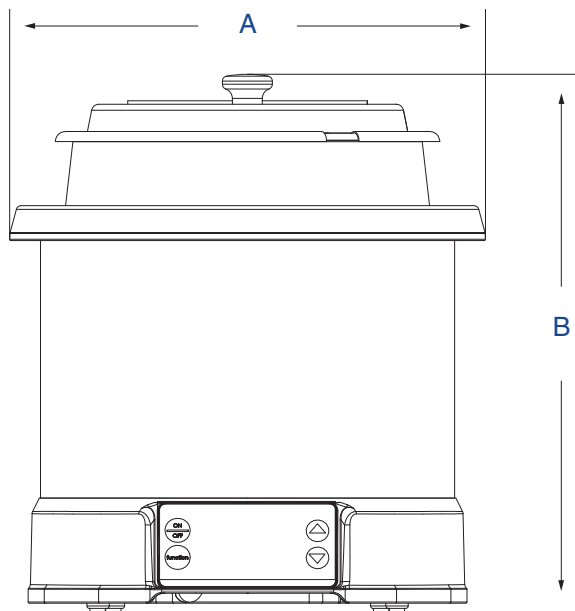

Receptacles

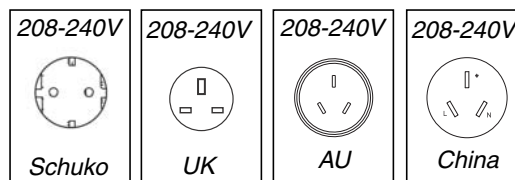

SPECIFICATIONS

| Item | Color | Capacity | Dimensions | | Well Depth IN (CM) | Voltage | Watts | Amps | Plug | Shipping Dimensions IN (CM) | Shipping Weight LB (KG) |
|----------|---------|----------|--|--|---|---------|-------|------|--------|--|-------------------------------|
| | | | (A) Width | (B) Height | | | | | | | |
| 7470210 | Natural | 6.6 L | 11 ⁷ / ₈ (30.3) | 13 ¹ / ₂ (34.2) | 6 ⁷ / ₈ (17.6) | 230 | 800 | 3.5 | Schuko | 14 ³ / ₄ x 14 ³ / ₄ v 15 (37.3 x 37.3 x 38.1) | 11.4 (5.2) |
| 7470240 | Red | | | | | | | | Schuko | | |
| 7470310 | Natural | | | | | | | | UK | | |
| 7470340 | Red | | | | | | | | UK | | |
| 7470410 | Natural | | | | | | | | China | | |
| 7470440 | Red | | | | | | | | China | | |
| 7470510 | Natural | | | | | | | | AU | | |
| 7470540 | Red | | | | | | | | AU | | |
| 74110210 | Natural | 10.4 L. | 13 ⁷ / ₈ (35.3) | 13 ¹ / ₂ (34.2) | 6 ⁷ / ₈ (17.6) | 230 | 800 | 3.5 | Schuko | 14 ³ / ₄ x 14 ³ / ₄ v 15 (37.3 x 37.3 x 38.1) | 13.4 (6.1) |
| 74110240 | Red | | | | | | | | Schuko | | |
| 74110310 | Natural | | | | | | | | UK | | |
| 74110340 | Red | | | | | | | | UK | | |
| 74110410 | Natural | | | | | | | | China | | |
| 74110440 | Red | | | | | | | | China | | |
| 74110510 | Natural | | | | | | | | AU | | |
| 74110540 | Red | | | | | | | | AU | | |

The Vollrath Company, L.L.C.
 Headquarters
 1236 North 18th Street
 Sheboygan, Wisconsin
 53081-3201 USA
 Tel: 920-457-4851
 Main Fax: 920-459-6573
www.vollrath.com

Vollrath Europe BV
 Beneluxbaan 7
 5121 AD RIJEN
 The Netherlands
 +31161870005

Vollrath of China
 Vollrath Shanghai Trading Limited
 29D, 855 South Pu Dong Road
 Shanghai, China 200120
 Tel: 86-21-50589580

Vollrath de Mexico S. de R.L. de C.V.
 Periferico Sur Edificio 2-C
 Col. Santa Maria Tequepexpan
 45601 Tlaquepaque, Jalisco Mexico
 Tel: (52) 333-133-6767
 Tel: (52) 333-133-6769
 Fax: (52) 333-133-6768